



**UNITED
STATES
ANTENNA
PRODUCTS, LLC.**

MODEL LP-1018BA



The Model LP-1018BA log periodic dipole antenna has been designed for transmission or reception in either oriented position – providing a vertical or horizontal polarization. Applications for this antenna include point to point, ground to air, surveillance, etc. The broadband width of 30 through 1100 MHz, together with its high gain of 8.0 dB, and high front to back ratio of 15 dB, yield an antenna of infinite possibilities and applications.

See 1018VMK for optional Vertical Mounting Kit.

MECHANICAL CHARACTERISTICS		ELECTRICAL CHARACTERISTICS	
Boom length	16'7" (5.05 m)	Frequency range	30-1100 MHz
Longest element	16.4' tip to tip (4.99 m)	Gain	8.0dB
Turning Radius	10' (3.04 m)	Input Impedance	50 ohms
Material	Aluminum and stainless steel hardware	VSWR	2.0:1 Nominal *
Max Wind Speed	100 mph (160.9 kmph)	Polarization	horizontal or vertical as oriented
Minimum Mounting Height	20' (6.09 m)	Radiation Pattern	Uni-directional
		Maximum Power	500 watts at 1000 MHz 1000 watts at 400 MHz 1500 watts at 100 MHz and below
Weight	44 Pounds (20 kg)	Input Connector	Type "N" Female
		Recommended Feedline	RG-213/u for runs of 50 feet or less

United States Antenna Products, LLC 5263 Agro Drive Frederick, Maryland 21703 USA


Phone: 240-341-7120

Fax: 240-341-4980

www.usantennaproducts.com

VSWR

LP-1018

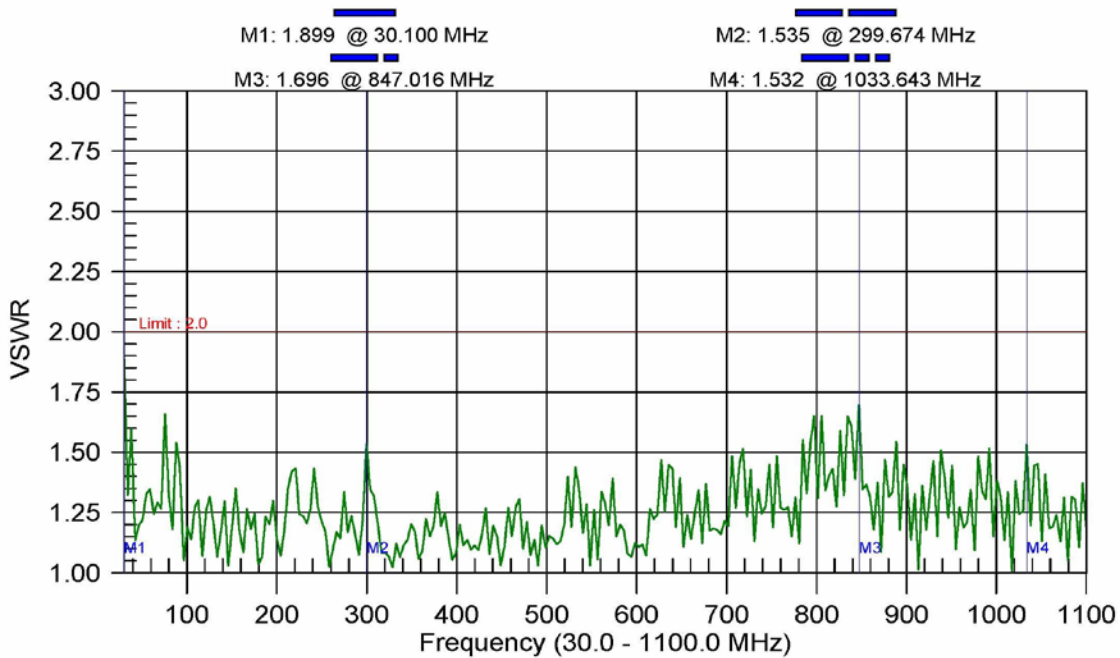

Resolution: 259
Std: CDMA US Cellular
Date: 06/07/2011
Model: S331D

CAL:ON(COAX)
Channel: N/A
Time: 10:47:40
Serial #: 00736073

CW: ON

United States Antenna Products (USAP) manufactures at our Frederick, Maryland plant.

*VSWR depends upon the height of the antenna above ground, ground conditions, and the influence of other structures or antennas in the vicinity. The specification is for ideal conditions.

United States Antenna Products, LLC 5263 Agro Drive Frederick, Maryland 21703 USA

Phone: 240-341-7120

Fax: 240-341-4980

www.usantennaproducts.com